



Product specification sheet

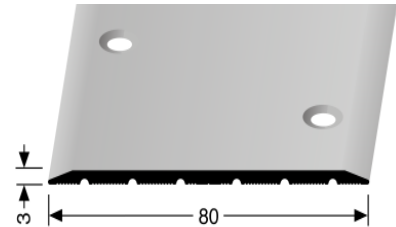

- **Profile Type:**

444 S

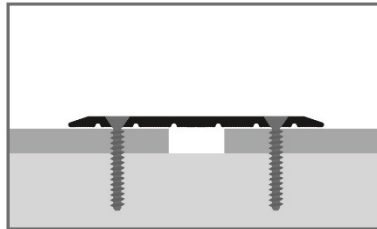

- **Description:** connecting profile
- **Version:** countersunk drilled
- **Length:** 5.0 m; 3.0 m; 2.70 m; 1.0 m; 0.90 m
- **Width:** 80 mm
- **Height:** 3 mm
- **Alloy of the profile:** EN AW-6060 (AlMgSi0,5F22)
- **Anodized colours:** **F4** silver, **F5** gold, **F9** sand, **F6** bronze, **F2** stainless steel optic
- **Additional colours:** **F3** aluminium polished
- **Installation:** fastening with dowels and screws
- **Fire protection class:** A1 = non - flammable

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

Installation/Laying

1. Ensure that the floor or wall is dry, even and free from dirt. If the floor or wall is dusty it may be necessary to use a suitable primer before the installation.
2. Cut the profile to the required length using an appropriate blade and cutting tool for stainless steel.
3. Trowel the setting material over the leg making sure that there is full coverage within the perforations and along the edge of the leg. Set the tiles or flooring directly against the trim with or without a grout joint. Depending of the flooring tile are installed with a small joint and parquet without a joint.
4. Depending of the surface there might be a protection foil on the surface (only for fine polished version). Remove the protective film only after the joint material has been filled in.

Attention: For the cutting of stainless steel please pay attention that the cutting is made with tools which are made especially for steel, the correct speed of cutting to avoid that the steel gets blue.

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.