


Product specification sheet



- **Profile type:**

2504

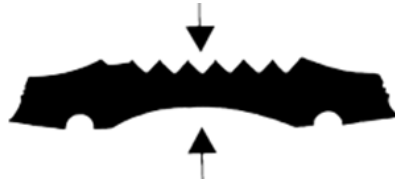

- **Type:**

2504

- **Description:**

slip-resistant insert with expansion joints

- **Application:**

changeable insert for stair the nosing profiles 700, 701, 702, 703, 704, 705, 706, 707, 708 and 709 manufactured from aluminium and brass

- **Length of the roll :**

25 m

- **Width of the insert:**

29,0 mm

- **tolerance:**

+ 0,3 mm

- **colours:**

black (F100), brown (F130), anthracite (F140), light grey (F142), beige grey (F143), beige (F149), blue (F169), green (F184*), red (F189), yellow (F190) und photoluminescent (F200)

* discontinued items

- **Anti-Slip property**

Factor R9

- **fire protection class:**

B2 not dripping

Product specification sheet



- **Instruction for Installation:**

The trimming and working up should be carried out after heating to room temperature (approx. 7 – 22°) to minimize afterward extension or shrinking.

Due to the longitudinal groove on the bottom side of the PVC-insert it is possible to compress it and to press it into dovetail guide of the metal profile without effort (please do not trim the PVC-insert in inserted condition).

The insert has to be glued punctiform and at the ends, to minimize possible shrinking, in particular at the bevel cuts.

The PVC-insert should be transported and stored protected.

The indicated data are typical or average values, but are not assured attributes. This product is not subject to the Construction Products Regulation.

* discontinued items

Technical data:

Insert-Characteristics	Carrier Material
Material	PVC-P / Soft-PVC
Base weight	132 g/m 185 g/m
Tear strength	16,2 N/mm ²
	ISO 527
Colour	Black, brown, anthracite, light grey, beige grey, blue, green, red, yellow and photoluminescent
Breaking strength in %	315 %